

Professional Projector Ceiling Lift Serie

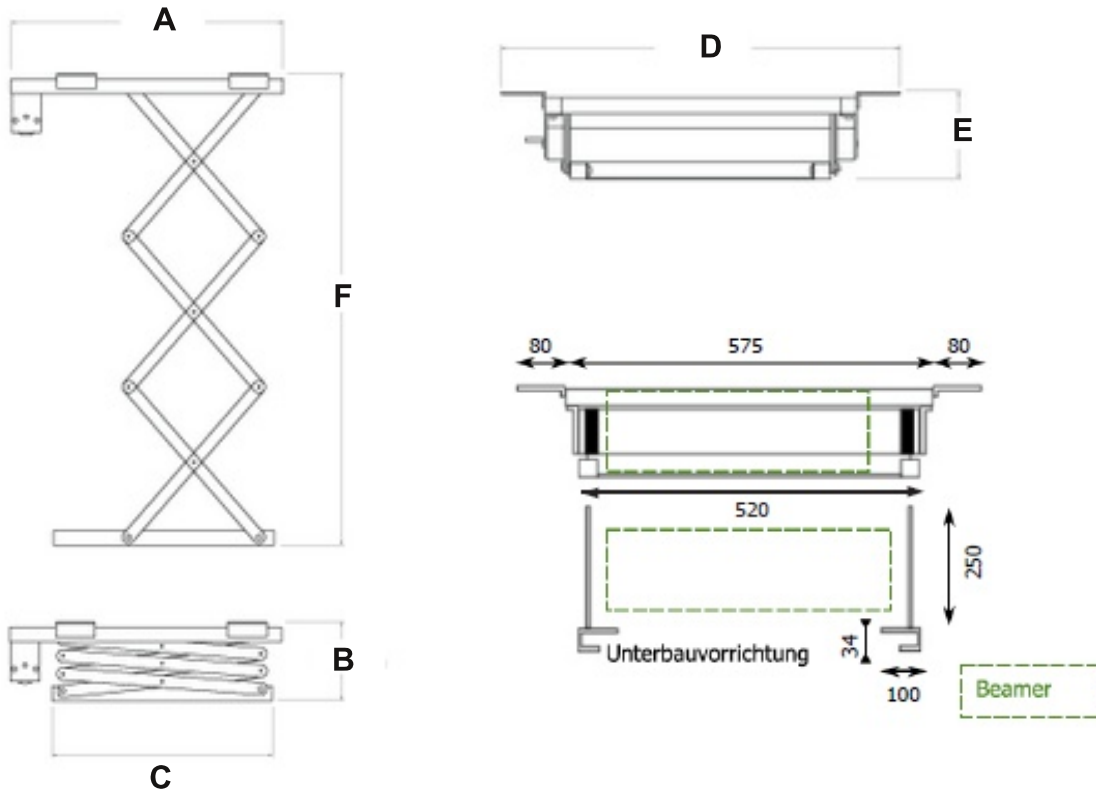

- Ceiling Integration
- 50.000 cycles tested
- Vibration free movement
- Conference room & Residential installation
- Movement adjustable
- 5 Years Flatlift Warranty

Available in various product versions.

- 800mm lowering
- 1800mm lowering
- Ultra flat design
- special sizes, special loads, special movements, marine solutions on request
- available on request with DGUV V17 (formerly BGV-C1)

Technical Data:

Productnumber:	check table
e-Drives:	Tube Drives
Operating voltage:	230V~ Input
Power consumption:	2A/ 400W
Connection:	Clamp connection
Control:	Radio Remote 433Mhz / potentialfree contacts
Protection class:	IP20
Duty cycle:	10%
Temperature range :	-15 to +70°
Blocking protection:	./.
Anti-pinch protection:	./.
Lifting force:	150N
Max. speed:	35mm/s without load
Noise Level:	very low noise level
Bending moment:	./.
Colour:	RAL 9005 / RAL 9006 degree of gloss 30
Dimensions:	check table
Structure:	Steelconstruction, powdercoated
Certifications:	./.
 Additional equipment:	 IR-Remote Set Flatlift Remote APP

Professional Projector Ceiling Lift Serie
Product built in dimensions:


	A	B	C	D	E	F
Thinline 100 Art. Nr: FL-10124	555mm	160mm	450mm	737mm	160mm	800mm
Thinline 200 Art. Nr: FL-10133	555mm	230mm	450mm	737mm	230mm	1800mm
Thinline Ultra Art. Nr: FL-10060	555mm	120mm	450mm	737mm	737mm	200mm

Projector sizes:

	max.width	max. depth	max. height	max. weight
Thinline 100 Art. Nr: FL-10124	355mm*	440mm*	125mm*	15kg
Thinline 200 Art. Nr: FL-10133	355mm*	440mm*	125mm*	15kg
Thinline Ultra Art. Nr: FL-10060	340mm*	400mm*	80mm*	15kg

* Larger projectors can be installed below the panel.

Professional Projector Ceiling Lift Serie**Remarks:**

Our Thinline Beamer ceiling lifts are delivered in standard with an automatic movement as well as with triggers or potential-free contacts.

Optional control options:

- RS 232
- Flatlift APP
- radio 868MHz
- Infrared RC5 code

Further special sizes available upon request.

Tenderings:**Thinline 100 - Art.Nr.: FL-10124**

Motorized projector ceiling lift for surface mounting and intermediate ceiling mounting. Quiet Lowering the projector from the ceiling by 800mm

- Projector size 355mm x 440mm x 125mm.
- Max. Projector weight 15kg,
- Lift 800mm
- Drive stroke cylindrical,
- 230 V input voltage, max. 2A Power consumption at 300Watt power consumption

Product like manufacturer: Flatlift
Type: Flatlift Thinline 100

Thinline 200 - Art.Nr.: FL-10133

Motorisierter Projektor Deckenlift für die Aufputz- und Zwischendeckenmontage. Leise Absenkung des Projektors aus der Decke um 1800mm

- Projektorgröße 355mm x 440mm x 125mm.
- max. Projektor Gewicht 15kg,
- Hub 1800mm
- Antrieb Hubzylindrisch,
- 230V Eingangsspannung, max. 2A Stromaufnahme bei 300Watt Leistungsaufnahme

Produkt wie Hersteller: Flatlift
Type: Flatlift Thinline 200

Tendering:**Thinline Ultra - Art.Nr.: FL-10160**

Flat motorized projector ceiling lift for surface mounting and intermediate ceiling mounting.
Quiet lowering of the projector from the ceiling by 200mm

- Projector size 340mm x 400mm x 80mm.
- Max. Projector weight 15kg,
- stroke 200mm
- Drive stroke cylindrical,
- 230 V input voltage, max. 2A Power consumption at
300Watt power consumption

Product like manufacturer: Flatlift

Type: Flatlift Thinline Ultra