



- Furniture Integration
- Table Integration
- Kitchen Integration
- Programmable
- 200.000 cycles tested
- 5 Years Flatlift Warranty
- **very thin built in dimensions**

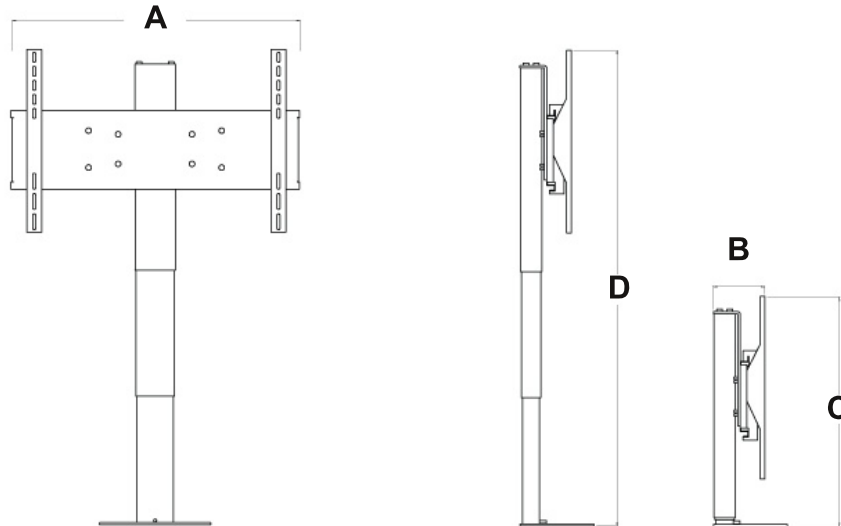
In 2 Variants available:

- 665mm rigid / 625mm manuel 360° swivel
- 955mm rigid / 955mm manuel 360° swivel

Technical Data:

Productnumber:	check table
e-Drives:	Columns
Operating voltage:	230V~ Input
Power consumption:	1,3A/ 300W
Connection:	Power cable, plug-in power supply
Control:	Radio Remote 433Mhz / potentialfree contacts
Protection class:	IP20
Duty cycle:	10%
Temperature range :	-15 to +70°
Blocking protection:	Electronically
Anti-pinch protection:	Electronically
Lifting force:	300N / 450N
Max. speed:	38mm/s without load
Noise Level:	Low uniform sound
Bending moment:	max. 100Nm dynamically
Colour:	RAL 9005 / RAL 9006 degree of gloss 30
Dimensions:	check table
Structure:	Steelconstruction, powdercoated
Certifications:	EN60335-1 / UL 962

Additional equipment:	Lid-O-Matic Serie
	Lid-Fixing-Brackets
	IR-Remote Set
	PLU Flatlift Software
	Flatlift Remote APP

Product built in dimensions:

A width
B depth
C height retracted
D height extended

30/42 Extraflat Art. Nr: FL-10104	780mm	73mm	630mm	1295mm
30/40 Extraflat 360° Art. Nr: FL-10166	780mm	85mm	675mm	1300mm
43/50 Extraflat Art. Nr: FL-10105	780mm	85mm	805mm	1760mm
43/50 Extraflat 360° Art. Nr: FL-10106	780mm	85mm	840mm	1795mm

max. TV height
max. TV weight
max. TV depth
max. stroke

30/42 Extraflat Art. Nr: FL-10104	615mm	35kg	100mm	665mm
30/40 Extraflat 360° Art. Nr: FL-10166	575mm	30kg	100mm	625mm
43/50 Extraflat Art. Nr: FL-10105	905mm	45kg	120mm	955mm
43/50 Extraflat 360° Art. Nr: FL-10106	905mm	45kg	120mm	955mm

Professional Extraflat Serie**Remarks:**

For the TV should be at least 10mm distance per side to the installation site to be selected.

Our systems are supplied as standard with a deadman circuit as well as potential-free contacts.

The rotatable versions of the Extraflat series have a zero position safety switch which does not allow an up-and-down movement in the rotated state.

Optional control options:

- RS 232
- Flatlift APP
- radio 868MHz
- Infrared RC5 code

All systems are TV downwards compatible.

Tendering:**30/42 Pop-Up Extraflat - Art.Nr.: FL-10104**

Flat motorized TV lifting system for floor, wall and furniture mounting
Rigid motorized TV lifting system. Quiet lifting movement and gentle start & stop
System. The system can be moved vertically up and down and contains an electronic
Blocking and anti-pinch protection.

- Display sizes 30-42 inches.
- Max. TV height 615mm
- Max. TV Weight 35kg,
- Drive stroke cylindrical,
- 230 V input voltage, max. 1.3A Current consumption at
300Watt power consumption

Product like manufacturer: Flatlift

Type: Flatlift 30/42 Extraflat

30/40 Pop-Up Extraflat 360° manuel swivel - Art.Nr.: FL-10166

Flat motorized TV lifting system for floor and furniture mounting. Manual 360 °
Rotatable. Quiet lifting movement and gentle start & stop system.
The system can be moved vertically up and down and rotates 360 ° and contains an
electronic blocking and anti-pinch protection.

- Display sizes 30-42 inches.
- Max. TV height 615mm
- Max. TV Weight 35kg,
- Drive stroke cylindrical,
- 230 V input voltage, max. 1.3A Current consumption at
300Watt power consumption

Product like manufacturer: Flatlift

Type: Flatlift 30/40 Extraflat 360 ° m.s.

Tendering:**43/50 Pop-Up Extraflat - Art.Nr.: FL-10105**

Flat motorized TV lifting system for floor, wall and furniture mounting
Rigid motorized TV lifting system. Quiet lifting movement and gentle start & stop
System. The system can be moved vertically up and down and contains an electronic
Blocking and anti-pinch protection.

- Display sizes 43-50 inches.
- Max. TV height 905mm
- Max. TV Weight 45kg,
- Drive stroke cylindrical,
- 230 V input voltage, max. 1.3A Current consumption at
300Watt power consumption

Product like manufacturer: Flatlift
Type: Flatlift 43/50 Extraflat

43/50 Pop-Up Extraflat 360° manuel swivel - Art.Nr.: FL-10106

Flat motorized TV lifting system for floor and furniture mounting. Manual 360 °
Rotatable. Quiet lifting movement and gentle start & stop system.
The system can be moved vertically up and down and rotates 360 ° and contains an electronic
blocking and anti-pinch protection.

- Display sizes 43-50 inches.
- Max. TV height 905mm
- Max. TV Weight 45kg,
- Drive stroke cylindrical,
- 230 V input voltage, max. 1.3A Current consumption at
300Watt power consumption

Product like manufacturer: Flatlift
Type: Flatlift 43/50 Extraflat 360 ° m.s.